


TRUE LOCK Distal Humerus Medial Plates are indicated for;

- Intra-articular fractures of the distal humerus.
- Supracondylar fractures of the distal humerus.
- Nonunions of the distal humerus.
- Osteotomies of the distal humerus.

Distal humerus fractures make up 2% of all fractures and approximately one third of humerus fractures.

4 hole between 6-12.

TRUE LOCK Distal Humerus Medial Plates are made of Ti6Al4V ELI material (ASTM F136).

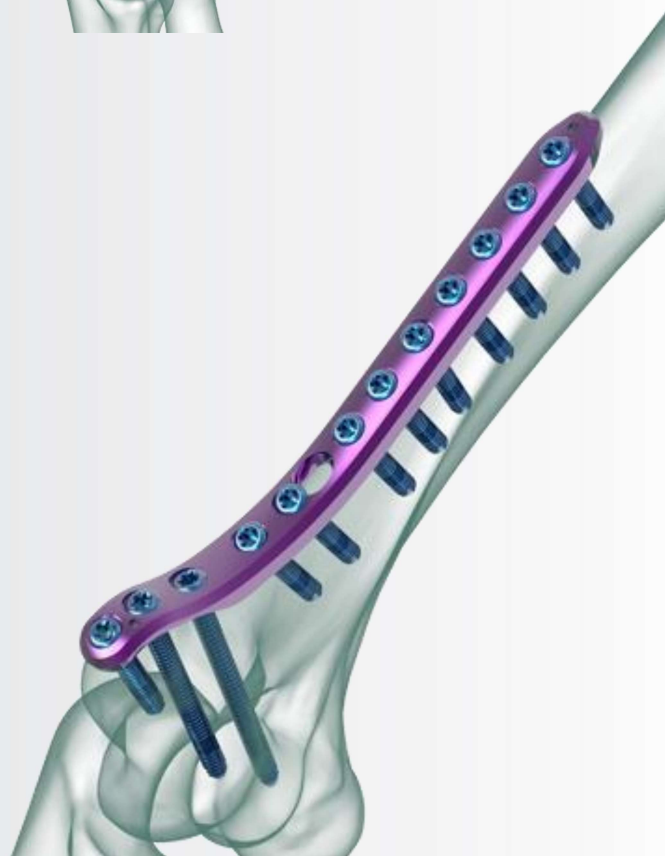

TRUE LOCK Distal Humerus Medial Plate Features




Low plate-and-screw profile and rounded plate edges minimize potential for tendon and soft tissue irritation.



Elongated Combi hole in the neck and shaft facilitate plate adjustment and allow locking or compression options.

True-Distal Humerus Medial Locking Plates are precontoured for anatomic fit. No need to bend during the surgery.

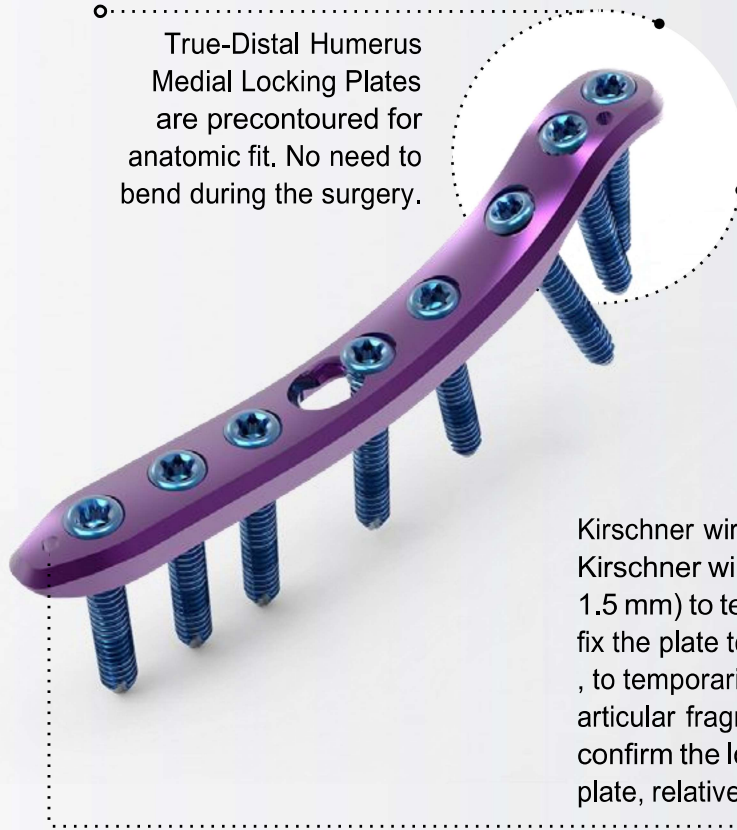


Kirschner wire holes accept Kirschner wires (up to 1.5 mm) to temporarily fix the plate to the bone, to temporarily reduce articular fragments, and to confirm the location of the plate, relative to the bone.

TRUE LOCK Distal Humerus Medial Plate Screws Info

Reference Number:	Hole Count:	Length (mm)
201-10080-006	6 hole	55
201-10080-008	8 hole	75
201-10080-010	10 hole	90
201-10080-012	12 hole	110


2.7 mm Non-Locking Cortical Screw



2.7 mm Locking Cortical Screw



3.5 mm Non-Locking Cortical Screw



3.5 mm Locking Cortical Screw



4 mm Non-Locking Cancellous Screw



4 mm Locking Cancellous Screw



4 mm Locking Cannulated Cancellous Screw

